

ADDENDUM NO. 2

TO: ALL PLAN HOLDERS

RE: McCURTAIN COUNTY RURAL WATER DISTRICT NO.8
PHASE I STATE HIGHWAY 3 WATER MAIN RELOCATION IMPROVEMENTS
Bid Date: March 16TH, 2021 – 2 p.m.

ADDENDUM DATE: March 12, 2021

The Plans, Specifications and Contract Documents for the above referenced project are hereby modified as follows:

1. Highway Bore Clarification:


All Highway Bores shall include Steel Casing Pipe as required by ODOT. Each end of the casing pipe shall be sealed and vented to the R.O.W. Vents shall be 2-inch painted steel pipe and 36" above natural ground. Identification markers shall be included and installed at each Vent per ODOT Standards.

2. Revised BID FORM:

Multiple Bid Items have been corrected with regard to quantity or description such as highway bores and plugging of existing mains. This Bid Form shall replace the original form.

ADDENDUM NO. 2 ISSUED BY:

A.L. FRANKS ENGINEERING

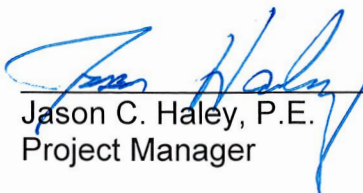

Jason C. Haley, P.E.
Project Manager

McCurtain Co. RWD #8

St Hwy #3 – Utility Relocation

BID PROPOSAL

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
1.	1,160 L.F.	Furnish and Install 2" Water Main (PVC DR-21 Class 200), Fittings, including trench excavation, laying, bedding, blocking and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F. \$ _____		
2.	13,460 L.F.	Furnish and Install 8" Water Main (PVC DR-21 Class 200) Fittings, including trench excavation, laying, bedding, blocking and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F. \$ _____		
3.	120 L.F.	Furnish and Install 8" Water Main (Ductile Iron Pipe) including Fittings, trench excavation, blocking and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F. \$ _____		

BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
4.	8,200 L.F.	Furnish and Install 10" Water Main (PVC DR-21 Class 200), Fittings, including trench excavation, laying, bedding, blocking and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F. \$ _____		\$ _____
5.	110 L.F.	Furnish and Install 2" Water Main (HDPE DR-11) with by directional BORE (Driveways), including fittings, excavation, blocking and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F. \$ _____		\$ _____
6.	1,470 L.F.	Furnish and Install 8" Water Main (HDPE DR-11) with by directional BORE (Driveways & Creeks), including fittings, excavation, blocking and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F. \$ _____		\$ _____

BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
7.	80 L.F.	Furnish and Install 10" Water Main (HDPE DR-11) with by directional BORE (Driveway), including fittings, excavation, blocking and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F. \$ _____		\$ _____
8.	330 L.F.	Furnish and Install 2" Water Main (HDPE DR-11) with 6" STEEL Casing (0.280" thk) by directional BORE, including fittings, excavation, seals, vents, blocking and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F. \$ _____		\$ _____
9.	464 L.F.	Furnish and Install 4" Water Main (HDPE DR-11) Pipe with 8" STEEL Casing (0.322" thk) by Directional BORE, including casing spacers, end seals, vents, excavation, blocking and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F. \$ _____		\$ _____

BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
10.	450 L.F.	Furnish and Install 8" Water Main (HDPE DR-11) with 14" Casing (HDPE DR-11) by directional BORE, including casing spacers, end seals, excavation, blocking and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F. \$ _____		\$ _____
11.	350 L.F.	Furnish and Install 10" Water Main (HDPE DR-11) with 16" STEEL Casing (0.375" thk) by directional BORE, including casing spacers, end seals, vents, excavation, blocking and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F. \$ _____		\$ _____
12.	350 L.F.	Furnish and Install 10" Water Main (HDPE DR-11) with 16" Casing (HDPE DR-11) by directional BORE, including casing spacers, end seals, excavation, blocking and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F. \$ _____		\$ _____

BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
13.	6 EA.	Bore and Install 3/4" Long Side service with 2" STEEL Casing (0.154" thk) Under State Hwy, up to 150 feet in length, with meter assembly per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA. \$ _____	\$ _____	\$ _____
14.	17 EA.	Furnish and Install 3/4" Short Side service, to include up to 15 feet of 3/4" Polytube, with meter assembly per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA. \$ _____	\$ _____	\$ _____
15.	3 EA.	Furnish and Install Standard 2" Blowoff Hydrant per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA. \$ _____	\$ _____	\$ _____

BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
16.	1 EA.	Furnish and Install Standard Fire Hydrant assembly per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____
17.	4 EA.	Furnish and Install 2" M.J. Gate Valves including valve box and blocking per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____
18.	4 EA.	Furnish and Install 4" M.J. Gate Valves including valve box and blocking per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____

BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
19.	2 EA.	Furnish and Install 6" M.J. Gate Valves including valve box and blocking per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____
20.	10 EA.	Furnish and Install 8" M.J. Gate Valves including valve box and blocking per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____
21.	6 EA.	Furnish and Install 10" M.J. Gate Valves including valve box and blocking per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____

BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
22.	12 EA.	Tie-In 2" Water Main per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____
23.	3 EA.	Tie-In 3" Water Main per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____
24.	1 EA.	Tie-In 4" Water Main per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____

BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
25.	2 EA.	Tie-In 6" Water Main per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____
26.	4 EA.	Tie-In 8" Water Main per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____
27.	1 EA.	Tie-In 10" Water Main per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____

BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
28.	1 EA.	Tie-In 12" Water Main per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____
29.	1,000 LF.	Perform Rock Excavation of Native Rock (only as Approved by Engineer) as described in the Plans & specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
30.	2 AC.	Perform Clearing & Grubbing within State R.O.W. as described in the plans & specifications for the unit price of _____ Dollars and _____ Cents/ACRE	\$ _____	\$ _____

BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
31.	1 L.S.	Furnish all labor and install all equipment, including sample taps for testing and sterilization of treated mains and appurtenances per plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ XXXXXXXX	\$ _____
32.	1 L.S.	Trench Safety per Technical Specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ XXXXXXXX	\$ _____
33.	1 L.S.	Perform Hydro-Seeding as defined in the Stormwater Pollution Prevention Plan per Technical Specifications for the unit price of _____ Dollars and _____ Cents/L.S.	\$ XXXXXXXX	\$ _____

BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
34.	1,000 LF.	Provide & Install Silt Fence as defined in the Stormwater Pollution Prevention Plan per Technical Specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
35.	4 EA.	Provide & Install Rock Filter Dam as defined in the Stormwater Pollution Prevention Plan per Technical Specifications for the unit price of _____ Dollars and _____ Cents/EACH	\$ _____	\$ _____

BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
36.	1 L.S.	Abandonment of Existing Mains shall include plugging Upon completion of testing and connection to new mains. This Lump Sum Items shall include (5-2" Plugs)(1-10" Plug)(2-3" Plugs) (3-4" Plugs)(1-8" Plug)(1-6" Plug) with all excavation and blocking for the LUMP SUM price of		
		_____ Dollars and		
		_____ Cents/L.S.	\$ _____	\$ _____
TOTAL BASE BID			\$ _____	_____